

Monitor Nozzles

Fog Nozzle Model 6000RE




SAFETY INDUSTRIES

Pty Limited

Description

Orion manufactures a range of constant flow master stream fog nozzles. The Model 6000 series are capable of ranging in flow from 1000 litres per minute to 2,000 litres per minute. The Model 6000RE fog nozzle is a electric actuated remote control nozzle for use with Warden 8190 electric remote controlled monitors in non-hazardous areas.

The Model 6000RE fog nozzles are manufactured in Gunmetal (LG2) with optional electroless nickel plating. The use of nickel plating where nozzles are to be exposed to sea water is highly recommended. It is possible to also manufacture the Model 8000RE in aluminium alloy (hard anodised) and other materials to customer order.

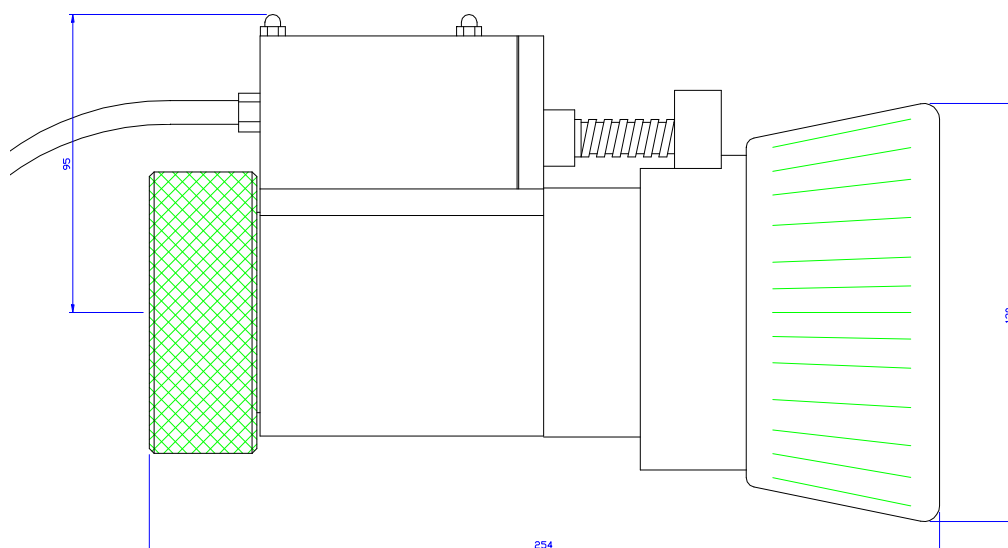

Throw Performance 1900lpm Stem

		STRAIGHT STREAM	NARROW FOG	WIDE FOG
PRESSURE	FLOW (lpm)	THROW (M)	THROW (M)	THROW (M)
450 kPa	1520	45	20	12
600 kPa	1760	49	28	14
700 kPa	1900	55	31	18
800 kPa	2030	57	32	20
900 kPa	2150	60	33	21

ORION SAFETY INDUSTRIES PTY LIMITED

A.C.N. 002 538 696

Tel (61) 2 9821 2244 29 SHEPHERD STREET LIVERPOOL NSW 2170 FAX (61) 2 9821 2906 AUSTRALIA