

Monitors

65mm Portable Ensign Monitor



SAFETY INDUSTRIES
Pty Limited



Description

The Ensign Model 2530 65mm portable monitor is an stainless steel monitor with friction swivel locks. The monitor can be used with Orion Model 4000, 6000 and 8000 fog nozzles and Orion Foam Lord model FLD2-65 nozzles. It is not recommended that aspirating foam nozzles be used with these monitors. Tiller bar nozzle control allows easy nozzle movement.

Specifications

Maximum Flow:	3000 lpm
Horizontal Rotation:	90°
Vertical Movement:	+30° to +90°
Inlet Connection	65mm BSP M
Outlet Connection	65mm BSP M

ORION SAFETY INDUSTRIES PTY LIMITED

A.C.N. 002 538 696


Tel (61) 2 9821 2244 29 SHEPHERD STREET LIVERPOOL NSW 2170 FAX (61) 2 9821 2906
AUSTRALIA

Materials of Construction

Waterway:	316 Stainless Steel
Swivels:	316 Stainless Steel
Balls:	Delrin
Grease Nipples:	316 Stainless Steel
Locking Knob:	Aluminium
Handle:	316 Stainless Steel
Fasteners:	316 Stainless Steel
Base	Aluminium (Bronze optional)
Spikes	Hardened tool steel

Performance Data

Friction Loss Curve

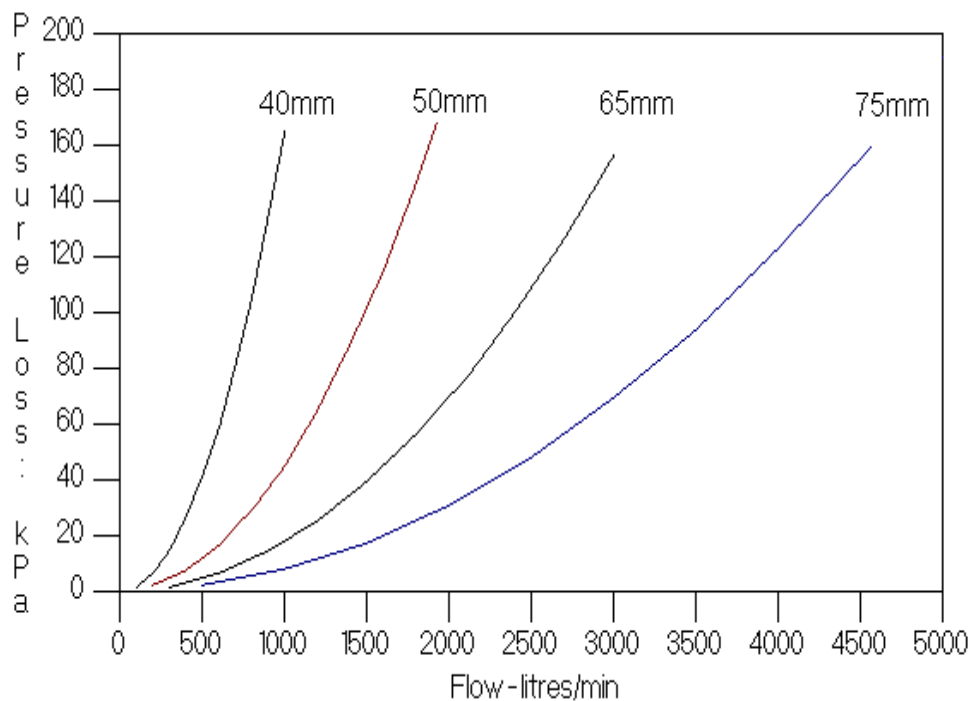

Options

Outlet Connection: 65mm BSP Male as Standard, 2.5" NHT optional.
Inlet Connection: Single 65mm BSP Male as standard. A clappered twin inlet in hard anodised aluminium is optional. A range of hose couplings can be fitted.

Model 2530GA – Alloy ground base
Model 2530GB – Gunmetal ground base