

# Monitor Nozzles

## Fog Nozzle Model 8005RE




SAFETY INDUSTRIES  
Pty Limited

### Description

Orion manufactures a range of constant flow master stream fog nozzles. The Model 8005 series are capable of ranging in flow from 1,500 litres per minute to 4,000 litres per minute. The Model 8005RE fog nozzle is a electric actuated remote control nozzle for use with Warden 8195 electric remote controlled monitors in non-hazardous areas.

The Model 8005RE fog nozzles are manufactured in Gunmetal (LG2) with optional electroless nickel plating. The use of nickel plating where nozzles are to be exposed to sea water is highly recommended. It is possible to also manufacture the Model 8005RE in aluminium alloy (hard anodised) and other materials to customer order.

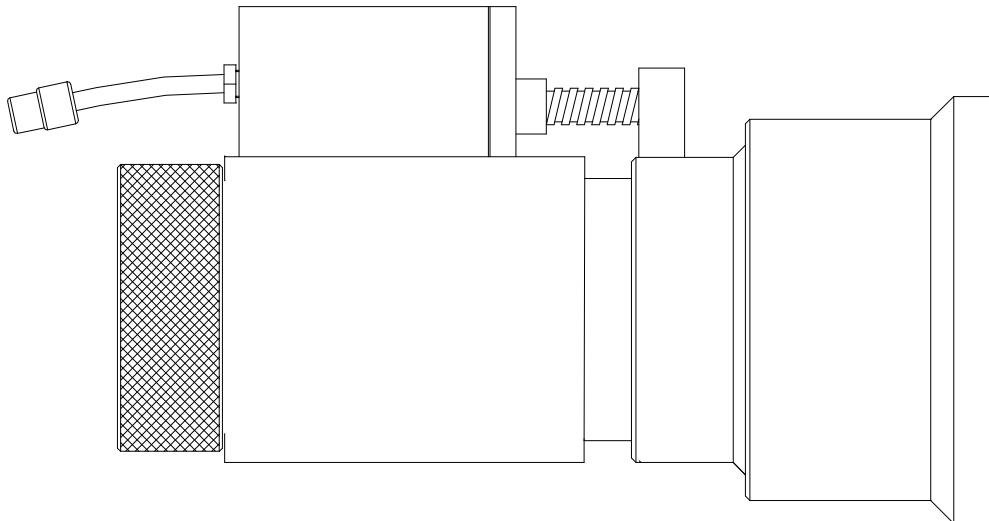

### Performance Data

#### 4,000lpm Stem

		STRAIGHT STREAM	NARROW FOG	WIDE FOG
PRESSURE	FLOW (lpm)	THROW (M)	THROW (M)	THROW (M)
600 kPa	3700	58	31	14
700 kPa	4000	63	34	16
800 kPa	4275	68	37	18
900 kPa	4535	73	40	20
1000 kPa	4780	75	43	21

ORION SAFETY INDUSTRIES PTY LIMITED

A.C.N. 002 538 696

Tel (61) 2 9821 2244 29 SHEPHERD STREET LIVERPOOL NSW 2170 FAX (61) 2 9821 2906 AUSTRALIA